




martini
dECO BLADES

INSTALLATION GUIDE


dECO Blades with Verto™ and Rondo KEY-LOCK® Grid System Integration

The Verto Suspension system that supports the dECO Blades has been designed to integrate directly into the Rondo KEY-LOCK® 139 Joining Clip.
To Install this system please ensure you have Rondo's Installation Instructions on hand.


Components:




Connector



End Caps




Aluminium Extrusion




Snap Covers


Tools you'll need:

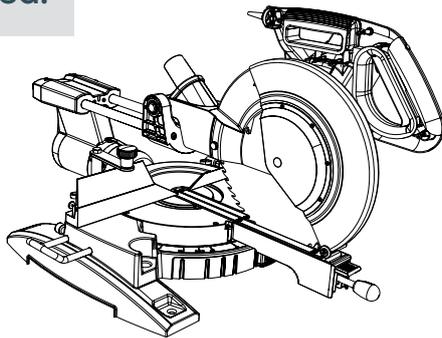


Drop Saw




Drill



Measuring Tape



Pencil

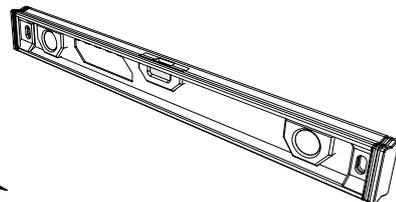

Level



Step 1


Assemble Rondo KEY-LOCK® Ceiling System as per the RONDO Instructions.

[Click Here](#)

Install the KEY-LOCK® system up to step 7 before referring to this installation

Step 2


In the area you are installing the dECO Blades with the Verto suspension system, slide the 139 Joiner Clip directly onto the Verto extrusion (instead of the Rondo furring channel) and click into Top Cross Rail firmly. Ensure 139 clip engages in both sides "click-clack".

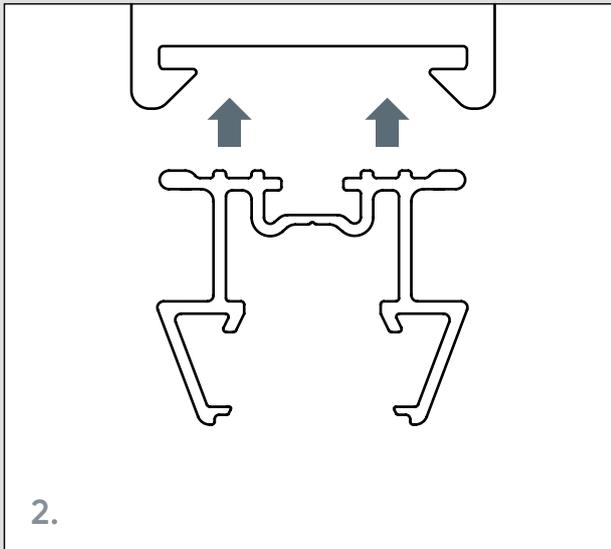

When installing Verto, please refer to Design Guide for Engineer certified design tables.

Step 3

Secure Verto extrusion to Top Cross Rail at a maximum of 600mm apart or at appropriate spacings for your lining choice. Ensure a 5-10mm clearance is left between end of the Verto extrusion and the wall, if installing to the edge of the room.

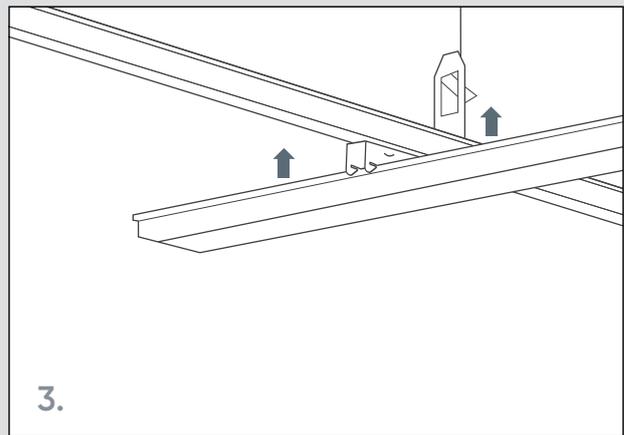




Step 4

Framing can be leveled by adjusting the 2534 Clip by squeezing tabs together. Refer to Rondo KEY-LOCK® Installation guide for further instructions on this.

Step 5 and 6

Snap your first acoustic blade flush to the edge of the Verto extrusion.

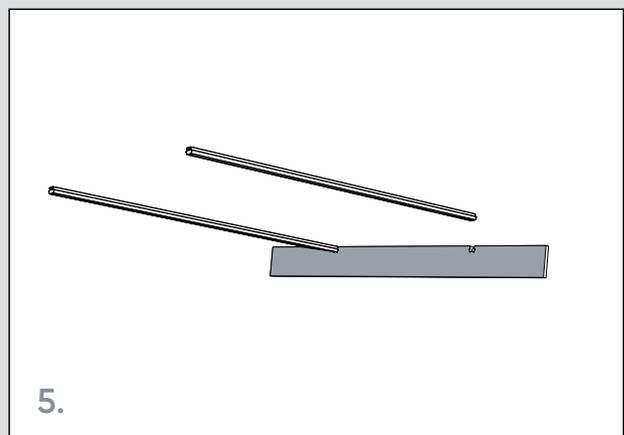


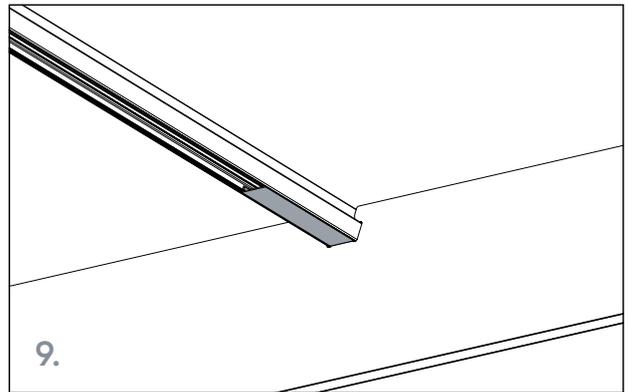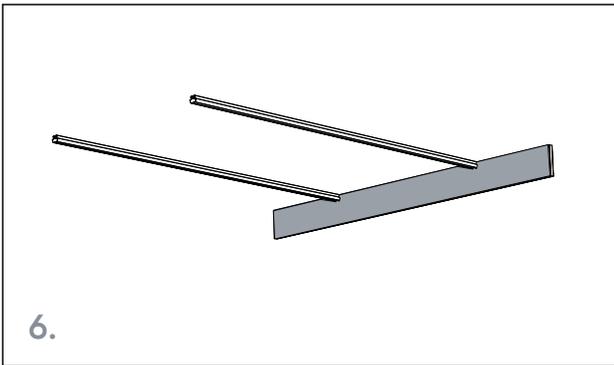

Step 7, 8 and 9






NOTE: Trim the Snap Cover into the required size to use as the snap cover/spacer for the dECO Blades using a drop saw. Ensure you consider the thickness of the acoustic panels when determining a spacing size to cover the entire 2.5m. Refer to dECO Blades Data Sheet for recommended spacing at csmartini.com.au

Insert the Snap Covers near the first blade you have already installed and slide across.




Step 10, 11 and 12

Continue until you have positioned all blades and snap covers across the entire system.

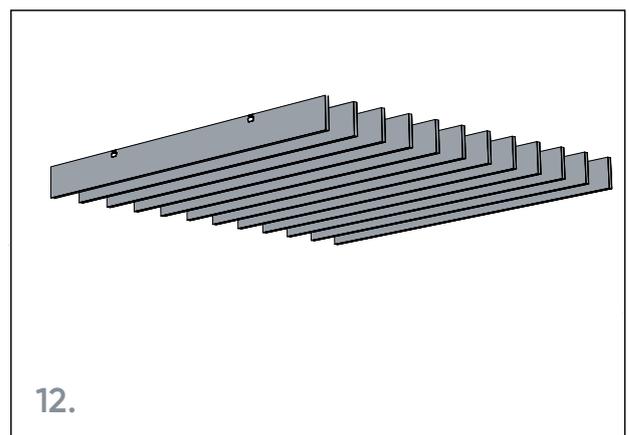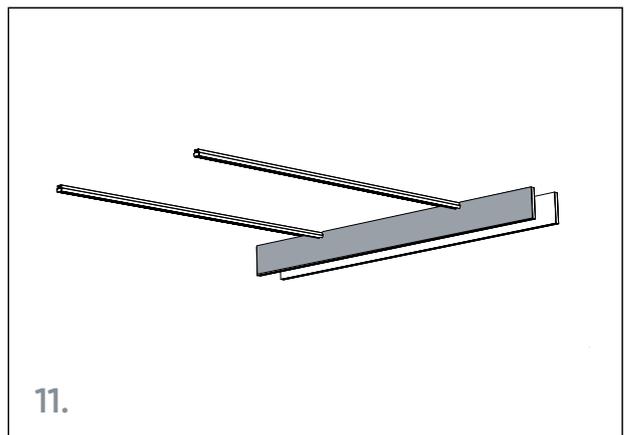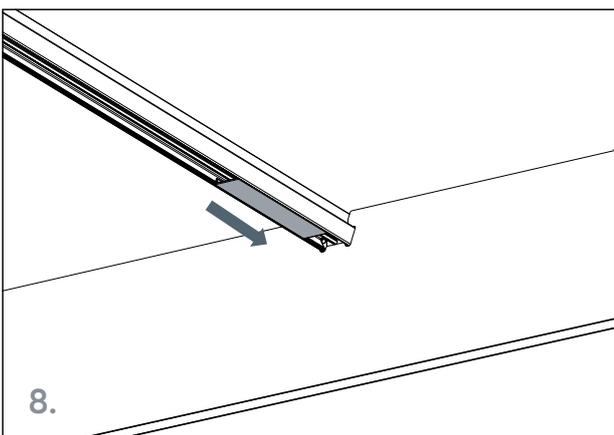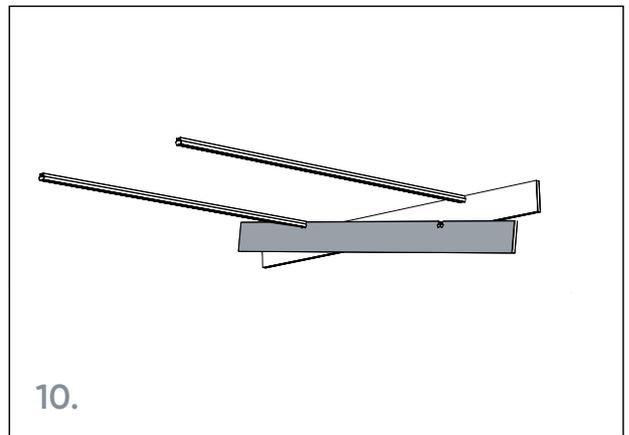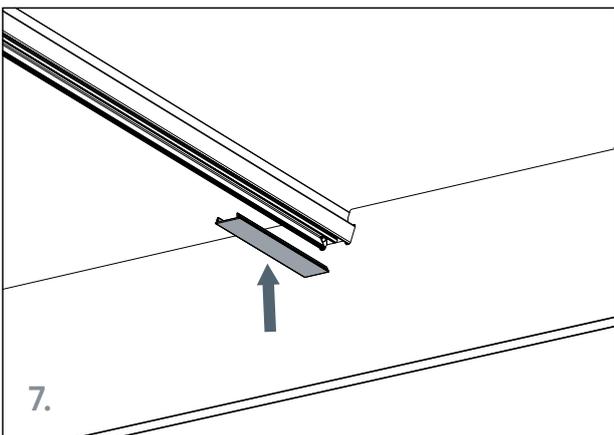

Step 13

For modular setup use supplied connector.

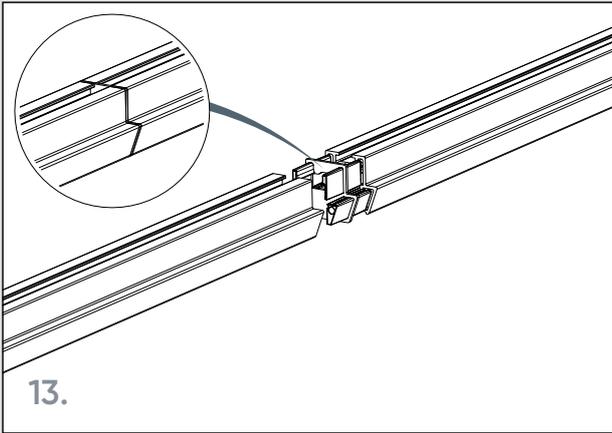

NOTE: Maximum of 4 connectors can be used in a row. If extending further than 4 lengths, a small gap between Verto channels is required before restart.